

1. Product name

Nenko Interactive - Step in sound reactive panel

2. Product code

96064085

3. Short description

Discover our innovative sound-reactive step-in panel, a unique addition that enriches the sensory experience. This panel is specially designed to encourage interaction and communication with visual effects that respond directly to sound, including voice and other sounds in the environment. It is perfect for healthcare facilities and environments where relaxation and stimulation are essential.

4. Product specifications


Height: 50 cm

Width: 50 cm

Dicke: 6 cm

Weight: 2.8 kg

5. Assembly

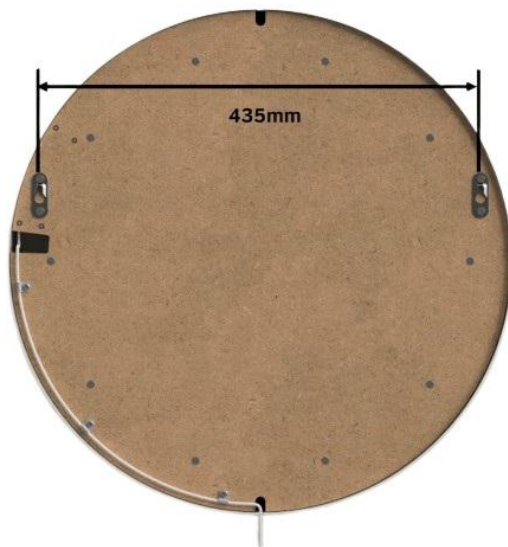

On the back of the panel you will find 2 hanging brackets. These are spaced 435 mm apart (centre to centre). Simply screw 2 screws into the desired mounting surface, at the correct distance, and hang the panel in place.

Once it is in place, the power cable and adapter plug can be plugged in and switched on.



6. How to use

On the side of the panel, you will find the panel's controls:



1. On/off switch

This toggle switch is used to turn the panel on and off.

2. Speed button

This button is used to control the speed of the LED patterns on the panel. The panel has 3 speeds (slow, medium and fast). When you press this button, the panel moves to the next speed. Each time you press this button, the speed is increased until it spins again.

3. Pair button

This button is used to change the product's pairing channel if you want it to communicate only with specific devices. Press and hold this button for 10 seconds to enter pairing mode. The panel flashes continuously in this mode. A compatible remote control can now be used to set the pairing channel.

This panel has 3 modes that you can cycle through by pressing the robust button on the front of the panel.

Mode 1. Sound to dim: panel LEDs are on, make sound to dim.

Mode 2. Sound to light: panel LEDs are off, make sound to light.

Mode 3. Moving rings: make sound to animate rings of LEDs

A compatible remote control can also be used to operate this panel and change the LED colours (22009134 & 22011134).





7. Troubleshooting

The Sound Reactive Step In Panel is designed with low maintenance in mind.

If problems occur:

- Switch off the panel, unplug it and check that the power cable is correctly plugged into the back of the unit (see below).



- Switch off the panel, unplug it and leave for 1 minute to perform a reset. After this time, plug back in and turn the panel back on.

8. Maintenance

If the product needs cleaning, use only a soft, damp cloth.

DO NOT use harsh chemicals or abrasives.

Electrical specifications

INPUT: 100-240V 50/60Hz, 0.7a

OUTPUT: 5V 3A

For more information, you can visit our website www.nenko.com

